

The magazine for Europe's plastic processors

eppm

Connect with U

[HOME](#) [INDUSTRY NEWS](#) [MACHINERY](#) [MATERIALS](#) [BLOG](#) [DIRECTORY](#) [SUBSCRIBE](#) [ADVERTISE](#)
[On the road with Haitian's new Zeres series](#)

Mould temp control platform solves complex part issues


 by [Dave Gray](#)
 May 15, 2014

[0](#) [RSS](#) [Print](#)


Targetting applications with high melting points, as well as long glass-fibre reinforced parts, materials handling specialist [Piovan](#) has developed "Dynatemp", a mould temperature control system for moulds with conformal cooling circuits.

The system using pressurised water, performs a two-stage process: in the first step, the mould is heated so as to facilitate the inflow of the melt and allow even filling (even in moulds with complex geometries, says Piovan) and eliminate thermal stress. In the second step, the mould is cooled to allow the injected material to solidify; this facilitates separation of the part from the sides of the mould and thus makes it easier to eject.

The system, which can be used as auxiliary equipment with any type of injection moulding machine, has a control unit that drives both the heating and cooling of the water by means of an electrical resistance and its forced circulation in two separate circuits (one for heating and the other for cooling), under different temperature conditions, up to 180°C in the heating phase and down to 20°C in the cooling phase.

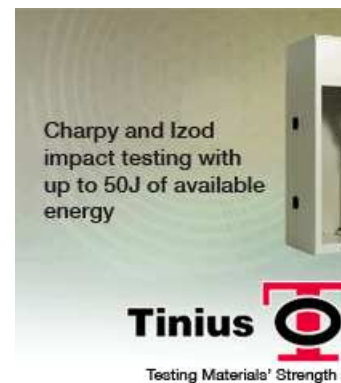

Tweets

[eppm](#) [David Gray](#)
 @EPPM_Magazine

Live Demonstrations in FIP's June Tr
[eppm.com/industry-news/...](#) #plastic #

[eppm](#) [David Gray](#)
 @EPPM_Magazine

Mould temp control platform solves co
 issues [eppm.com/machinery/moul...](#) #
 #injectionmoulding #moulds
[pic.twitter.com/LaXHUOrJ24](#)



Tweet to [@EPPM_Magazine](#)

EVENTS

[Interplas 2014](#)

30 September - 2 October 2014

The system works automatically, according to set parameters, using software which, interfacing with the machine's working parameters, governs temperature and pressure values at any given time.

Piovan explains that the system allows the surface of the moulded part to remain free of defects and irregularities, removing the requirement for finishing processes.

Dynatemp can also permit lower clamping forces compared with those needed when using traditional processes, claims Piovan.

Tags

Piovan, Temperature Control

Related



New paper reveals future of temperature control

Piovan looks back on 50 years in plastics

Mar 11, 2014

Comments

Type subject here...



Complete ancillaries to run live at K

Jul 26, 2013



BMW selects Italian drying systems for new site

Jun 18, 2013

Fakuma 2014

14 October - 18 October 2014

NPE 2015

March 23 - March 27

MATERIALS NEW



CO2 in Bayer products

Bayer Materials

has announced plans to invest €1.5 billion in 'CO2 Production', for turning waste CO2 into polymer. [more »](#)

[materials](#)



Breakthrough PET catalyst technology changes production around the globe

A new titanium catalyst technology for the industrial production of polyethylene terephthalate polyester is now being used around the globe as PET manufacturers seek to eliminate the use of heavy metal catalyst antimony oxide.


[materials](#)



Interview: SABIC enters market with renewable polyolefins

SABIC has launched its first ever certified renewable polyolefins. It is the first grades, sales and market as well as the future of renewables.

[materials](#)



Single wall carbon nanotube firm

Company promises to "double current production" of single wall carbon nanotubes with "unrivalled low production costs" in 2014.

[materials](#)